



VOCALISER

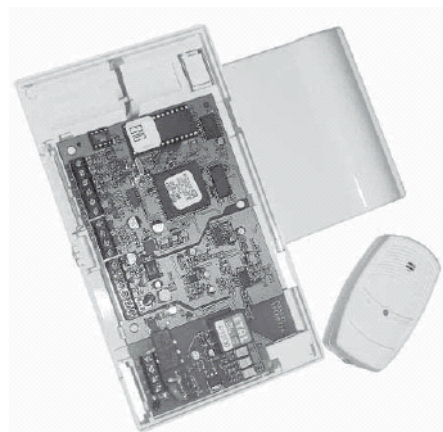

Bus Diagram

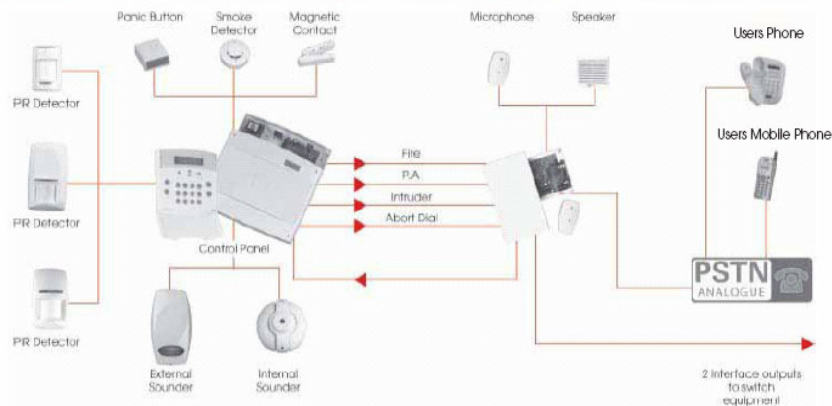

FEATURES AND CHARACTERISTICS



4 Voice message triggering inputs allows different types of activation signals generated by a panel to be separately monitored by the Vocaliser



With 4 Telephone numbers, upon activation, the Vocaliser can call up to 4 telephone numbers including Mobiles for immediate notification



2 Programmable Outputs allows for control of electrical equipment of choice, such as central heating and air conditioning



The Listening Feature enables user to listen in and to record into the premises from a remote telephone.

SPECIFICATION

SPECIFICATION		VOCALISER
GENERAL		
Number of triggering Inputs		4 Voice message triggering inputs
Telephone numbers		4 Telephone numbers
Outputs		2 Programmable outputs
Memory log		32 Event memory log
Programmable functions		Listen in, talk and record option
		Engineer and user security code access
		Programmable acknowledge facility
		Programmable abort facility
		Telephone line fail monitoring option
		Product Warranty of 2 Years
Physical Dimensions		36mm x 104mm x 185mm, 280gm
ELECTRICAL		
Supply Voltage		Supply Voltage
Current Consumption		Current Consumption
Positive Trigger Voltage		Positive Trigger Voltage
Negative Trigger Voltage		Negative Trigger Voltage
Input Response Time		Input Response Time
Telephone Line (A,B)		Telephone Line (A,B)
Series Connection (A1, B1)		Series Connection (A1, B1)
ENVIRONMENTAL		
Operating Temperature		Operating Temperature
Storage Temperature		Storage Temperature
OPTIONAL ACCESSORY		
Microphone		For use with the vocaliser – for user to listen in to premises