



D731X

CCTV Control Keyboard



Key Features


- RS-485 port for CCTV system control
- Built-in DSCP, Pelco D&P protocol
- Joystick control of PTZ functions
- Preset position and Cruise control
- User-friendly interface
- Firmware upgrade via RS-232
- Control Dome cameras, P/T/Z Receivers, Multiplexers, DVRs
- Maximum 255 devices can be controlled on the same bus, included 223 Dome Cameras or Receivers, 16 System Keyboards, 16 Multiplexers (or DVR) (only on D7313)
- Built-in Real Time Clock (only on D7313)
- Support System Clock Calibration (only on D7313)
- Optional 3-axis joystick

The D731X family of control keyboards harnesses the latest hardware and firmware technology to give you the best solution for surveillance control. Multiple cameras, Multiplexers and DVRs can be effortlessly setup and controlled via the D731X. Through the built-in RS232 port, the latest control firmware can be upgraded easily, assuring you the flexibility of customization unmatched by others.


D7312 is a basic control keyboard used for smaller CCTV system, up to 16 speed dome cameras are mapped directly to the 16 hot keys on the front panel. D7313 is useful in a large CCTV system, up to 223 Dome cameras and 16 Multiplexers/DVRs can be controlled by 16 keyboards.

Dependability and ultra-high reliability are key factors in the D731X design cycle. Every D731X is assembled with meticulous care and thorough testing at our ISO9001 compliant factory. High performance, reliability, and reasonable pricing, D731X is an ideal solution for your tough surveillance requirements.

Product Selection

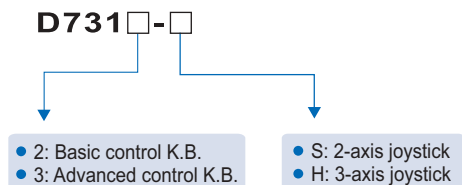

General Configuration

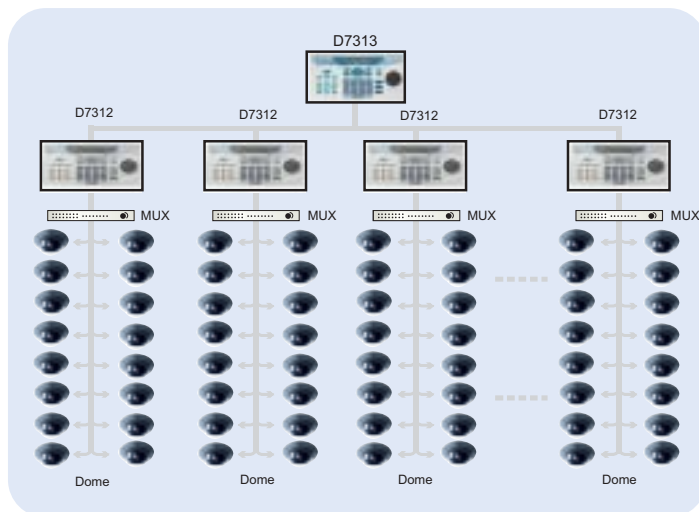

Technical Specification

Model	D7312	D7313
Power	12 Volt DC	
Power Consumption	5W	
RS- 485 port	RJ-11, Terminal Block x 1	
RS- 232 port	DSUB 9pin x 1	
Device on Bus	16 Cameras	255 Devices maximum
	1 Multiplexer	16 Multiplexers
Pan/Tilt Control	Manual Pan/Tilt	
Preset	128 maximum	
Auto Pan	On/Off	
Sequence	4 maximum	
Cruise	On/Off	
Lens Control		
Zoom	Tele/Wide	
Focus	Near/Far, Auto	
Iris	Open/Close, Auto	
Camera Setup	Yes	
Multiplexer Control	Channel select:16	
Multiplexer Setup	Yes	
Dimension (HxWxD)	330x175x65mm (13x7.9x2.6 inches)	
Operation Temperature	0 ℃~ 40 ℃ (32 ℉ ~ 104 ℉)	
Operation Humidity	Below 90%, non-condensing	
Weight	1.5kg (3.3 lbs)	

Product specifications and availability subject to change without notice.
 Certain product names mentioned herein may be trade names and/or registered trademarks of their companies.

Developed and Manufactured by:
DYNACOLOR
 Making Our World More Colorful

彩富電子股份有限公司

114台北市內湖區洲子街116號
 No.116, Jou Tz Street, Neihu, Taipei 114, Taiwan, R.O.C.
 Tel:886-2-2659-8898 Fax:886-2-2659-8868
 E-mail:info@dynacolor.com.tw
 Http://www.dynacolor.com.tw

Represented By:

Worldwide Distribution and Service Network

MKPB-731X-0403-EN01-A4