

SAMSUNG

SAMSUNG DIGITall
everyone's invited™

An Ideal Face of Security

Lighter, Less Space & Less Power



17" Security LCD Video Monitor

STM-17L

www.samsungcctv.com

Samsung Techwin's new STM-17L is a perfect solution for professional users in security. It delivers crisp pictures with bright of 300cd/m², luminance of 500:1 and response time of 20ms. Comparing with conventional CRT monitor, it is lighter and needs less space and less power. Moreover the compact and slim unit can be used standalone with its own desk stand or mounted on the wall with wall mount unit. The unit features composite video and s-video inputs and outputs, an SXGA input, and built-in speaker and dual scanning system. It can be connected to either 100 to 240 VAC universal power supply.

17" Security LCD Video Monitor

STM-17L




Specifications

Model		STM-17L
LCD Panel	Type	Amorphous active matrix super TFT LCD
	Screen Size	43.2cm (Diagonal)
	Maximum Resolution	1280 X 1024@75Hz
	Pixel Range	0.264mm X 0.264mm
	Display Colors	16.2M Color
	Contrast Ratio	500 : 1
	Viewing Angle	75° / 75° / 75° / 60° (Left / Right / Up / Down)
	Response Time	13msec
	Luminance	300cd/m ²
Synchronization	Horizontal Frequency	79.9kHz (Max.)
	Vertical Frequency	75Hz (Max.)
Power Consumption	Maximum	48W
	Power Saving Mode	Under 4W
Control key	Front Part	SOURCE, MENU / EXIT, AUTO / SELECT, POWER, , VOL / MUTE
Input Signal	Input	Video : Analog RGB(0.7Vpp) 75ohm, Composite in (BNC), S-VHS in
	Connector	Audio : Stereo in 15-pin Mini D-sub, Stereo, S-VHS, BNC
Output Signal	Output	Video Composite out(BNC)
Compatibility	IBM	VGA, SVGA, XGA, SXGA Normal & Ergonomic Modes
	Video	NTSC / PAL standard
Audio Output	Normal	1W/Ch
	Max	1.5W/Ch
Power Supply		Input : 100-240Vac (50/60Hz), 0.6A
Wall Mount		VESA Standard
Safety	Safety Standard	UL/C-UL, CE(LVD)
Standard & EMI	EMI	FCC, CE(EMCD)
Dimension	Size and Weight	380 X 171 X 417.5 / 5.8kg

Key Features

- 1280 x 1024@75Hz Resolution
- 500:1 High Contrast Ratio
- 300 cd/m² High Brightness
- 20ms Response Time
- BNC Loop Through ,S-Video, RGB Inputs
- Built-in Speakers

Dimensions

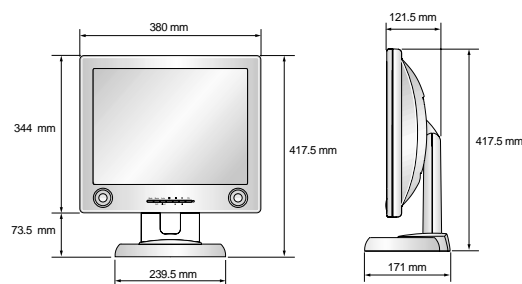

Optional Accessories



벽부착형 브래킷



Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



info-D.M/04.10

www.samsungcctv.com

SAMSUNG TECHWIN CO., LTD

145-3 Sangdaewon 1-Dong, Jungwon-Gu,
Sungnam, Kyungki-Do, Korea 462-121
TEL : +82-31-740-8137~8141 FAX : +82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC. ELECTRONIC IMAGING DIV.

40 Seaview Drive, Secaucus NJ 07094, U.S.A
TEL : +1-201-902-0347 FAX : +1-201-902-0429
Homepage : www.samsungcctv-info.com

SAMSUNG TECHWIN MOSCOW OFFICE

LENNINGRADSKY PR-KT, 37-A. KORP.14
RUSSIA, 125167, MOSCOW
TEL : +7-095-258-9296, 9298 FAX : +7-095-258-9297

SAMSUNG OPTO-ELECTRONICS UK LTD.

Samsung House, 1000 Hillswood Drive
Hillswood Business Park Chertsey Surrey KT16 OPS
TEL : +44 (0)1932 455 308 FAX : +44 (0)1932 455 325

TIANJIN SAMSUNG OPTO-ELECTRONICS CO.,LTD

7 Pingchang Rd, Nankai Dist, Tianjin, P.R China
Post Code : 300190
TEL : +86-22-27614724 (33821) FAX : +86-22-27616514